

Digital Lightning Counter Lightning Strike Counter / Recorder

Model – ETDLC 2



**MANUFACTURING OF EARTHING ELECTRODE | PURE COPPER | COPPER BONDING ROD |
EARTH FILL COMPOUND | LIGHTNING PROTECTION SYSTEM | EARTH PIT CHAMBER**



Digital Lightning Counter Lightning Strike Counter / Recorder

Model – ETDLC 2



Technical Specification

Model -	ETDLC 2
Display	LCD
Indicator	Lightning Event 0~9999999
Sequence of impulse	> 1s
Dimension of installation window (mm)	17mm
Dimension of counter (mm)	150x60x69 mm
Enclosure material	Ip67 ABC
Input speed	14Hz-100Hz
Operation temperature (°C)	0~+50°C & Storage -20~+75 °C
Counting Direction	Up
Battery type	Li-ion
Battery life	Up to 7 Years
Net Weight	0.30gm



Special Feature

- 7 digits display (0~9999999).
- Memory retention 7 years.
- Sensitive response and wide lightning current measuring range.
- Can be used with all kinds of lightning and surge protectors and equipment.
- It will check the real lightning strike every time.

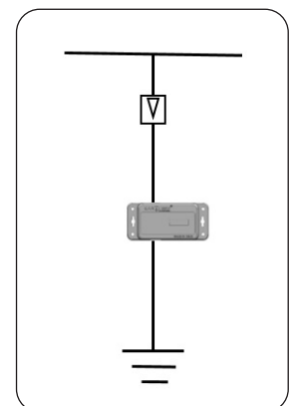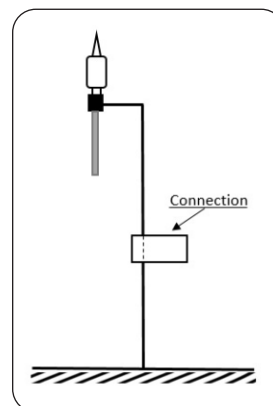

Installation & User Guidance

1. Display show event.
2. When the system is normally allowed, to open the lightning counter LCD display.

Note

- # no need power supply.
- # indoor use.
- # do not open counter box in warranty period otherwise warranty does not consider



- Designed and Manufacture By -

EARTHWAY TECHNOLOGIES LLP

Mfd Unit: - Plot No. A-30, Wadad Layout, In front of NH06 Express Hwy,
Near MIDC, Amravati - 444 701 Maharashtra, IND

Mob - 08408020303

Emails – earthwaytllp@gmail.com, info@earthwaytechnologies.com

www.earthwaytechnologies.com